



# K7BCE225/63B MOTORIZED IMPELLER

## TECHNICAL DATA

Model	CFM@ 0" S.P.	Cutoff S.P.	DC Volts	Amps	Watts	RPM	dBA	Min. Temp.	Max. Temp.
K7BCE225/63B	688	2.21	24	4.56	109	2255	67	-4°F/-20°C	158°F/70°C



## STANDARD FEATURES

- Low noise level
- 688 CFM capacity
- Compact size
- Nominal voltage 24VDC (18-36VDC)
- Precision balanced
- External rotor design
- Precision ball-bearing motors
- Reverse polarity protection
- Soft start
- Locked rotor protection
- Tachometer output (open collector)
- Controlled by 0-10VDC or PWM signal


## ACCESSORIES\*

Inlet Ring - P/N: 1114-07



**\*Note:** An Inlet Ring is recommended for optimum performance. These are sold separately, to be installed by the customer.



## PERFORMANCE

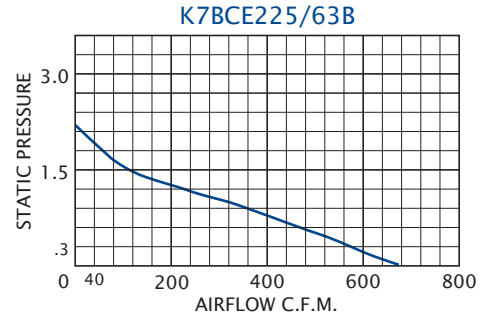


Airflow vs. static pressure curves are shown for 60 Hz input. Static pressure is in inches of water.

## DRAWINGS


Dimensions, inches [mm], are for reference only and are subject to change.

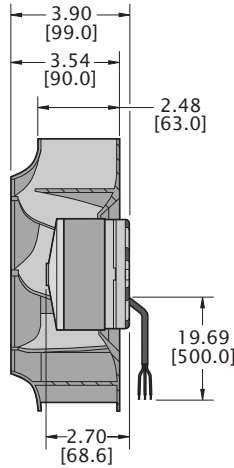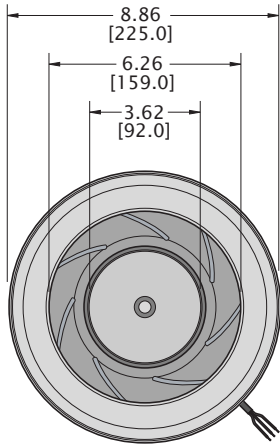

An inlet ring, which must be installed by the customer, is recommended for optimum performance.

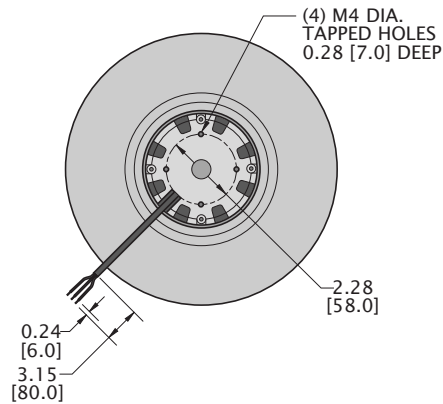

## INLET RING P/N: 1114-07

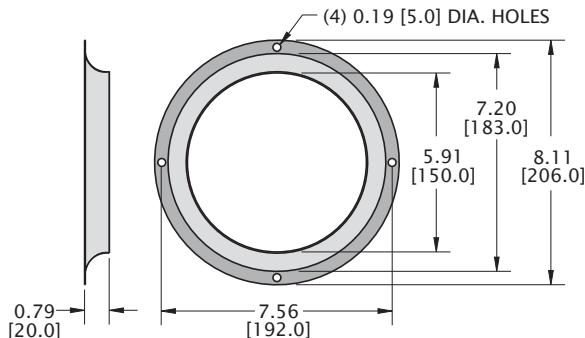

## TYPICAL INSTALLATION

